

????????

Test1

```
git : http://deve.work:33333/colin/mde.git
```

commit : c61827061d6a34cbd2ca2fae62b59fcb780f192e

prompt : `vscode``markdown`

fix commit : 3e64dfab0643fecc583bb1e77467373d7e43854e

--	--	--

1. Lute (3.8MB)
 1. `<script>` `onload` `id="vditorLuteScript"` `Vditor`
`addScript()` `lute` `id` `script`
`3.8MB`
 2. `window.__luteReady` `promise` `lute` `_boot()` `lute` `id`
`Vditor`
2. Icons XHR (43KB)
 1. `<script defer>` `ant.js` `id="vditorIconScript"` `Vditor`
`addScriptSync()` `id` `XHR` `—`
 2. `defer` `script` `id="vditorIconScript"` `addScriptSync`
3. Loading 1200ms
 1. `Vditor ready` 1200ms `loading`
 2. `ready`

--	--	--

1. Opus4.7  500K

Test2

```
git : http://deve.work:33333/colin/mde.git
```

commit : 5b9134576b7a11b52dc1c7962d2827c487c698bc

prompt : `inline code` `inling code` `inling code`

fix commit : `b234863461bed88652e6d6169f81ece3696416b6`

1. `<code>` marker 13.6 vs 16px y 2. marker `overflow: hidden + width: 0` glyph 3. `color: transparent` `caret-color: auto` `color` `inline-code` marker height: 1em; font-size: 85%; overflow: visible; color: transparent; caret-color: var(--textarea-text-color) headless chrome `getBoundingClientRect` " " headless `headless: 'new'` caret overflow `./run-local-vditor-demo.sh` VS Code Reload Window

- 1. Opus4.7 1M

Test3

git: `http://deve.work:33333/colin/logix`

commit: `49f4742415cdd6ca2067e8edef9b021b0f810d33`

prompt:

`src/utls/insight`

- 1.
- 2.
- 3.

Fable5-xhigh: 10 json 2

:

30

- lane —war_pipewait_pipevec1d mac2d.inflight lane


stall mac2d.state
- wait_reg #377f1a #bdb1a8— #1a7f37 #a8b1bd
 lane + lane canvas lane putImageData
drawImage GPU canvas— lane lane
 BGRA
 lane

GPU GPU
v7.21

canvas drawImage lane ImageData putImageData canvas— CPU
→
 lane
6 × 5 0 JS

GPU canvas canvas
—

stage

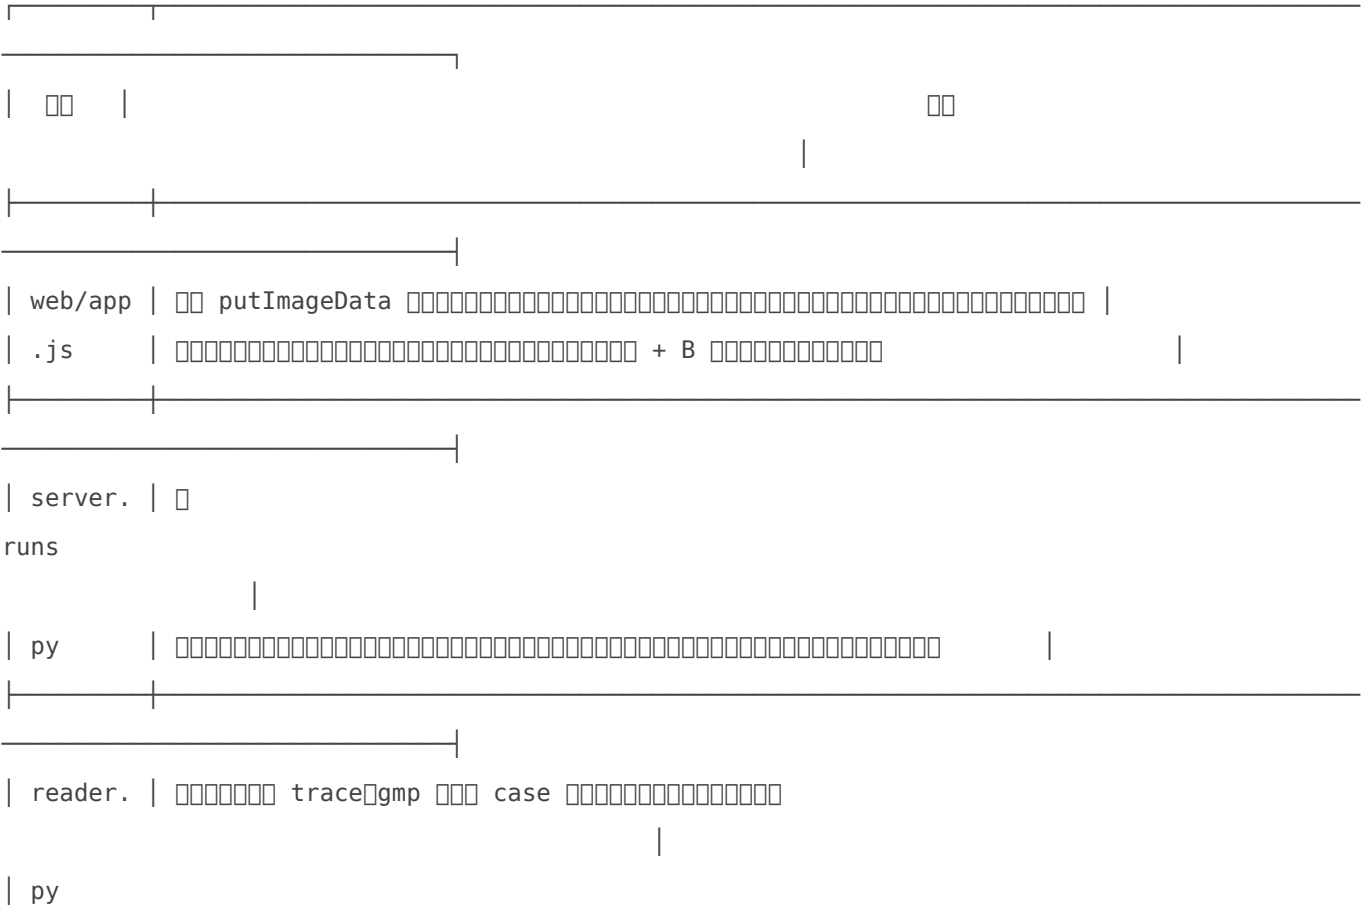

Test5

git: http://deve.work:33333/colin/logix

commit: 277d6531daf85d6b51c4db51aac365a916cafce2

prompt:

src/utils/insight

Agent

cycle

round 0

Opus 4.8-xHigh(1M):

cycle

fix

GLM-5.2:

cycle

fix

Fable 5-High:

121.2k/900k tokens

- :→,app.js (Math.round(xToT(x))),,(
 (),);,

:5px ,t (2222045
2222033);(Math.floor),

(src/utils/insight/web/app.js + index.html):

- app.js:2244 Math.round(xToT(...)) → Math.floor(xToT(...)),Shift+

Math.round

—,

- APP_BUILD 46→47,index.html ?v= 47(,)

(Playwright,Chromium + Firefox):DPR 1/1.25/1.5/2

(
0.00px);,

(),,

Test6

git: `http://deve.work:33333/colin/alldata.git`

commit: `d42e6a9b22ef0c50dd67bdf2598f7a8e4fdd1674`

prompt:

```
auto/auto.py  run("markdown", 1317,1320)  
```

```
pymupdf/pymupdf4llm  markdown  1
 stages.py  markdown  1
 "markdown": Stage("RawPdf", "Markdown", transform=_pdf_to_md_async, default_concurrency=1),
```

Sonnet 5 with xhigh effort: `PyMuPDF fitz / pymupdf4llm`

Opus 4.8-xHigh(1M):

```
 Confirmed the root cause. With concurrent_limit=1 all four files process; with the default
(5) three of them silently vanish.
```

GLM-5.2(1M):

```
target
 _pdf_to_md PDF

 stages.py _run_dir_stage _run_line_stage break
if end_index is not None and int(name) > end_index:
    break # bug
[start_index, end_index]
```

Test7

```
git : http://deve.work:33333/colin/mde.git
```

commit : 25a0c408a40d8938142dd3cbd13b007793355c95

prompt : □□□□□ □□□□□□□ code block□□□□□□□

--	--	--

- `Ctrl+R` VS Code `Ctrl+R`—`Reload Window`

```

VS Code webview scrollbar-color: var(--vscode-scrollbarSlider-
background)

var(--vscode-editor-background) } microsoft/vscode scrollbar-color scrollbar-color html
scrollbar-color: auto::-webkit-scrollbar

Chromium 121+ scrollbar-color auto::-webkit-scrollbar

--vscode-editor-background— scrollbar-color ::-webkit-scrollbar VS Code
demo scrollbar-color

src/webview/main.css scrollbar .cm-scroller
—scrollbar-color:

rgba(127,127,127,0.4) transparent scrollbar-width: thin

```

--	--	--

1. **Fable 5-High:** 2

[illegible]

Test8

```
git : http://deve.work:33333/colin/mde.git
```

commit : bd85e2055639643a08e48b6d1768121ec724e821

prompt :

```

1  git diff --staged --diff --git --changes
2  git diff --staged --diff --git --changes

```

- 1. **Opus 4.8-xHigh(1M):**

1.

tab+

2.

3.

tab
- 2. **doubao-seed-2-0-code-preview-260215:**
- 3. **GLM-5.2(1M):**

1.

tab+

2.

196K

opus4.8

tab

3.

Fable

diff

applyEdit

Opus 4.8

Fable5
- 4. **Fable 5-xHigh:**

3

```

1  git diff --staged --diff --git --changes
2  git diff --staged --diff --git --changes

```

```

vscode --tab,
diff --staged --diff --git --changes

```

```

diff --staged --diff --git --changes

```

Test9

git: <http://deve.work:33333/colin/alldata.git>

commit: [c7255d9e33e416862fed2dd36604da0dcfcd09b3](#)

prompt:

```

Auto/FactGraph/2.9.fact --deepseek-v4-pro --glm-5.2
Auto/Resource/Fact
fact

```



GLM-5.2 □□□□□□

1. 0000000700.txt @b30000"000000...0000000000"00000000000000000000GLM 0
0("0000", "0000")—00deepseek 0 00("0000",
"0000")—000000000000000000000000"00"00000000000"0"00
2. 0000000700.txt @b22,b2400000"0000 LLM 0000000000"0GLM 0 00(..., "LLM0000000000")—0000
deepseek
00 00(..., 00("LLM", "0000").00("0"))00000"0000LLM0000000000"0000000000
3. 00000001000.txt @b150000"0000000000000000"0GLM 000"00"0000deepseek 00.00("00")00"0000
X"000"0000 X"000"0000"00000000
4. 00000001000.txt @b1700000"000000"0000000000deepseek 0
00("000000")—0000000000000000"00"00000"000"00000GLM 000000000000"000≠00"0000
5. 0000000000"00"01000.txt @b580000"AI 0000000000000000000000000000"0GLM 000"00"0deepseek
00000000000"00"000000000000

deepseek-v4-pro

1. 0000000000001000.txt @b15000000000"00000000000"00000000deepseek 000 00(...)0GLM 000
00(...).00("000")0"00000"0000000000"0000"0000"00000000"0000000000000000000
2. 000000000700.txt @b60000"000000000...0000"000000000deepseek 000000000GLM 00000000000
.00(...) 0000—000000000000"00000000"0
3. 00000000000000000000000000—00000000000"00000000"0"00000000000000"000deepseek
0000 00(...) 000GLM
00000000000000000000000000"000000000...0000000000000000000000"—0000 deepseek
00000000000000000000000000"00000000"000000000000

□ □ □ □ □ □ □ □ □

- ```
- 700.txt @b13/b14" " Llama-7B" " " "
- " " "1000.txt @b12@b15 —" ≠" "
- 1000.txt @b13
```

# Test10

```
git: http://deve.work:33333/colin/logix
```

commit: 5ad99ded353b1a022c6041182c51322564e80551

prompt:

□□□□□□□□□□□□□□□□ □□□ □□□□□□□□□□□□□□□□

□□□□□□□□□□□□ □□□□

Agent

\*\*    \*\*    gap

```
drawBarLane [|||||] 2px [||||] if (!nx) continue[]
```

-   $\rightarrow$    $xr - 2$
-   $/$    $\rightarrow$    $xr$

333

**Opus 4.8-High(1M):** [Progress bar]

## GLM-5.2:

### Fable 5-High:

Revision #29

Created 2026-03-16 07:45:44 UTC by Colin

Updated 2026-07-08 06:25:34 UTC by Colin